


WEIGHT ONLY SCALES

G-305 series



Dimensions

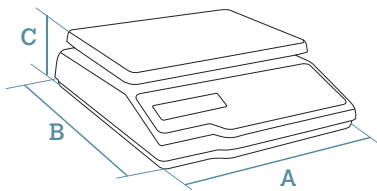

DATA IN mm

A	320
B	400
C	116

Plate dimensions:
L303 x W233 mm.


Weight with packaging: 6.0 kg.



LCD
SEGMENT
DISPLAY



RS-232



INTERNAL
RECHARGEABLE
BATTERY
(IN G-305 B)



**METROLOGICAL
VERIFICATION**
OPTIONAL (EU)

Characteristics and functionality

Main characteristics

- Weight only scale without printer.
- Internal rechargeable battery in G-305 B:
 - > Up to 120 hours' runtime, depending on conditions of use (with battery at full load and without backlit).
- Valid for legal metrology.

Features

- Weighing.
- Tare and fix tare.
- Manual zero.

Capacity / Accuracy

- Multi-range (3,000 divisions):
 - > 6 kg / 2 g - 15 kg / 5 g.
 - > 15 kg / 5 g - 30 kg / 10 g.

Formats

- Flat.

Construction

- Structure:
 - > ABS plastic housing.

- Console:
 - > Keypad with 5-keys and backlit LCD segment display of 5 digits.
- Plate:
 - > Type: flat.
 - > Material: stainless steel.

Communication to PC / POS / ECR

- RS-232 interface.
- Communication protocols available for the main POS and ECR in the market.
- Multi-protocol: communication protocol is selected in the scale (40 protocols available). More protocols can be added from PC by telecharge (maximum: 60 protocols more).
- "OPOS" driver.

Power supply

- Mains: 220 VAC with 12 V / 500 mA adapter.
- 6 VDC / 4.5 Ah internal rechargeable battery (only for G-305 B).

Energy consumption

- G-305: 3 W (approx.).
- G-305 B: 3.5 W (approx.).

Models

G-305 / 6

CAPACITY 6 kg / 2 g - 15 kg / 5 g (multi-range)

Ref.: **70301S00NE**_ _

G-305 B / 6

CAPACITY 6 kg / 2 g - 15 kg / 5 g (multi-range)

Ref.: **70301S02NE**_ _

G-305 / 15

CAPACITY 15 kg / 5 g - 30 kg / 10 g (multi-range)

Ref.: **70301S00NF**_ _

(M) optional

G-305 B / 15

CAPACITY 15 kg / 5 g - 30 kg / 10 g (multi-range)

Ref.: **70301S02NF**_ _

(M) optional

Accessories

Italian plate

L357 x W235 x H55 mm.

The Italian plate is placed on the flat plate. A new weight adjustment might be necessary. Consult.

Ref: BCR71



Note:

- The references correspond to standard models: White ABS plastic casing, backlit LCD segment display, flat stainless steel plate and RS-232 interface.
Capacity: multi-range, from 6 / 15 kg to 15 / 30 kg.